
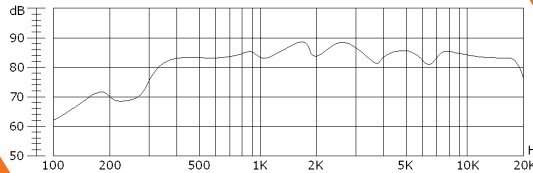



SoniCrest SPEAKER SOUND GENERATORS

HSB28U



Dimensions

Unit : mm
Tolerance : ± 0.3 mm

Frequency Response

Normalization to 1W Input Power and
1m Measuring Distance

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	*Frequency Range (Hz)	*Sound Pressure Level at 1KHz (dB)	Operating Temperature (°C)	Storage Temperature (°C)
$8 \pm 15\%$	1.5	2	$580 \pm 20\%$	580 ~ 20000	83 ± 3	-20 ~ +60	-30 ~ +60

HSB28U-8

The specification are only for 8 Ω version. Specification for other impedance is available upon request.
*Value normalized to 1W input power and 1m measuring distance.