


Detail of Products

Ordering Information:

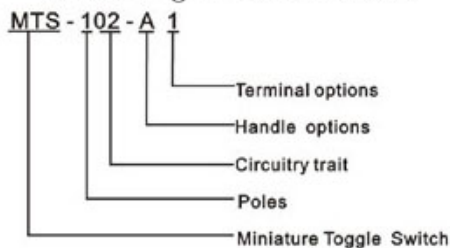



Specification:

1. Rating: 6A 125VAC; 3A 250VAC
2. Contact Resistance: 20mΩ max.
3. Insulation Resistance: 500VDC 1000MΩ min.
4. Dielectric strength: 1500VAC, 1Minute
5. Operating Temperature: -55°C ~ +85°C
6. Electrical Life: 20,000 Cycles

Circuitry trait:

| 型号 Model No | Circuitry trait | | | 类型 Type | 端子数 Terminals |
|----------------|-----------------|-----|------|------------|------------------|
| | | | | | |
| MTS-101 | ON | - | OFF | SPST | 2P |
| MTS-102 | ON | - | ON | SPDT | 3P |
| MTS-112 | ON | - | (ON) | SPDT | 3P |
| MTS-103 | ON | OFF | ON | SPDT | 3P |
| MTS-113 | ON | OFF | (ON) | SPDT | 3P |
| MTS-123 | (ON) | OFF | (ON) | SPDT | 3P |

Toggle cap(d): Base color:




Water proof cap:

| 型号 Model No | Circuitry trait | | | 类型 Type | 端子数 Terminals |
|----------------|-----------------|-----|------|------------|------------------|
| | | | | | |
| MTS-201 | ON | - | OFF | DPST | 4P |
| MTS-202 | ON | - | ON | DPDT | 6P |
| MTS-212 | ON | - | (ON) | DPDT | 6P |
| MTS-203 | ON | OFF | ON | DPDT | 6P |
| MTS-213 | ON | OFF | (ON) | DPDT | 6P |
| MTS-223 | (ON) | OFF | (ON) | DPDT | 6P |



Handle options:

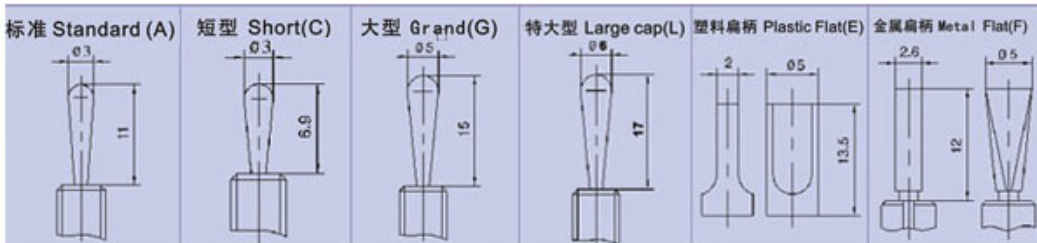

Terminal options:

Affix Annex:

