


# SoniCrest Microphones

*HMC10A*  
Series





**Dimension**  
Unit : mm  
Tolerance :  $\pm 0.3$ mm

## Frequency Response

Applied Voltage  $V_s = 1.5V$

Load Resistance  $R_L = 2.2k\Omega$

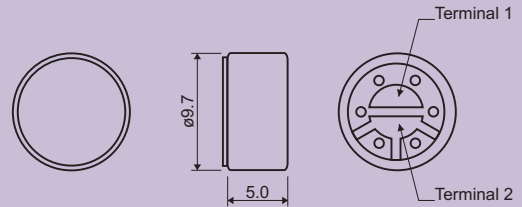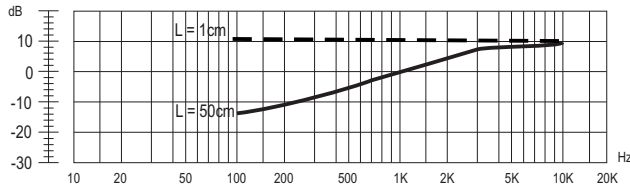

## Specification (all data taken at 25°C unless otherwise specified)

Model	Directivity	★Sensitivity (dB)	Rated Voltage (V)	Maximum Operating Voltage (V)	Current Consumption (mA)	Frequency Range (Hz)	Impedance ( $\Omega$ )	S/N Ratio (dB)
HMC1001A-65	Noise Canceling	-45 $\pm$ 3	1.5	10	$\leq 0.5$	100 ~ 10000	Low	$\geq 60$

★ Condition : 0dB = 1V/pa, 1kHz, Different sensitivity level is available upon request.