
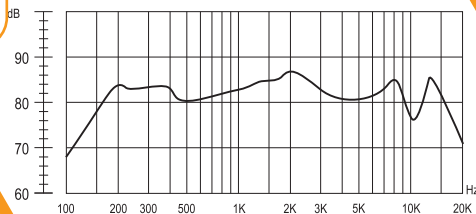


SoniCrest SPEAKER SOUND GENERATORS

HSP52A-8

Dimension

Unit: mm
Tolerance : 0.3mm



Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

● Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	2	4	200 ± 20%	200 ~ 13000	82 ± 3	-10 ~ +40	-10 ~ +40

HSP52A-8



The specifications are only for 8Ω version. Specification for other impedance is available upon request.

★ Value normalized to 1W input power and 1m measuring distance.

Dimension

Unit: mm
Tolerance : 0.3mm

HSP57A-8

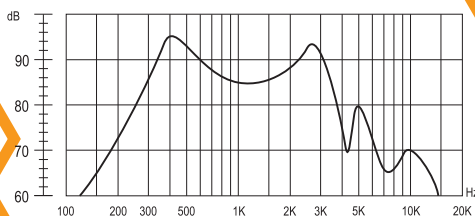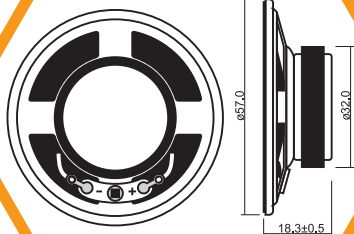

Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

● Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	0.3	0.6	450 ± 20%	450 ~ 3500	85 ± 3	-10 ~ +40	-10 ~ +40

HSP57A-8



The specifications are only for 8Ω version. Specification for other impedance is available upon request.

★ Value normalized to 1W input power and 1m measuring distance.

HSP64A-8

Dimension

Unit: mm
Tolerance : 0.3mm

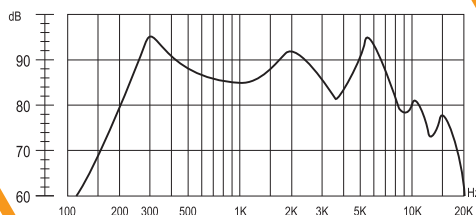

Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

● Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	0.5	1	360 ± 20%	360 ~ 3400	86 ± 3	-10 ~ +40	-10 ~ +40

HSP64A-8

The specifications are only for 8Ω version. Specification for other impedance is available upon request.

★ Value normalized to 1W input power and 1m measuring distance.